

# M40 SLD G

## SPECIFICATIONS

Nominal Voltage (V)	12V
Capacity at C/100	48 Ah
Capacity at C/20	40 Ah
Capacity at C/5	34 Ah
Weight	31.5 lbs. (14 kg)
Plate Alloy	Lead Calcium
Posts	Epoxy Seal Threaded Brass Post
Container/Cover	Polypropylene
Operating Temperature Range	-76°F (-60°C) - 140°F (60°C)
Charge Voltage @ 77°F (25°C)	
Cycle	13.8 - 14.6 volts
Float	13.4 - 13.6 volts
Vent	Self-sealing
Electrolyte	Sulfuric acid thixotropic gel
Terminal	C (Threaded insert w/ 1/4" - 20 round hole)



Rated non-spillable by ICAO, IATA and DOT

Made in the U.S.A. by East Penn Manufacturing Co, Inc.

## Valve-Regulated, Gelled-Electrolyte Battery



## DIMENSIONS


*Inches (mm)*

**Length** 7.76 (197 mm)

**Width** 6.62 (168 mm)

**Height** 6.87 (174 mm)  
*Including terminal*

**Gel Cycle Life vs Depth of Discharge at +25°C (77°F)  
Based on BCI 2-hour Capacity**

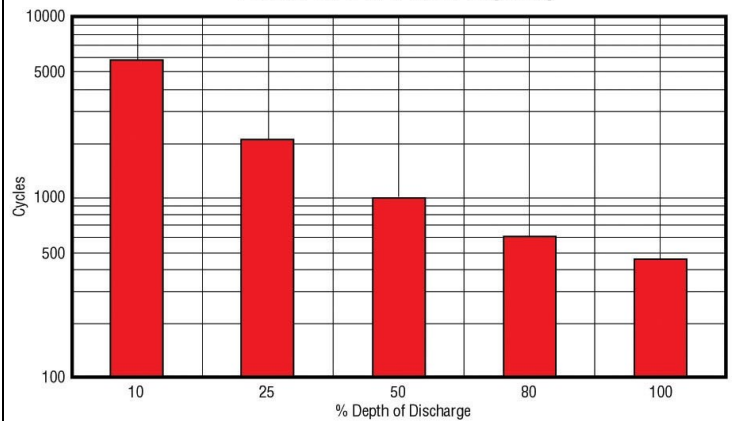

**MK Battery**

1631 South Sinclair Street • Anaheim, California 92806

Toll Free: 800-372-9253 • Fax: 714-937-0818 • E-mail: sales@mkbattery.com

