

# 8G4D

## SPECIFICATIONS

Nominal Voltage (V)	12V
Capacity at C/100	210 Ah
Capacity at C/20	183 Ah
Capacity at C/5	153 Ah
Weight	136.5 lbs. (62 kg)
Plate Alloy	Lead Calcium
Posts	Forged Terminals & Bushings
Container/Cover	Polypropylene
Operating Temperature Range	-76°F (-60°C) - 140°F (60°C)
Charge Voltage @ 77°F (25°C)	
Cycle	13.8 - 14.6 volts
Float	13.4 - 13.6 volts
Vent	Self-sealing
Electrolyte	Sulfuric acid thixotropic gel
Terminal	S (SAE)



Rated UN2794 - Wet, Filled with Acid

Made in the U.S.A. by East Penn Manufacturing Co, Inc.

Distributed by:

## Valve-Regulated, Gelled-Electrolyte Battery



## DIMENSIONS


*Inches (mm)*

**Length** 20.73 (527 mm)

**Width** 8.44 (214 mm)

**Height** 9.99 (254 mm)  
*including terminal*

**Gel Cycle Life vs Depth of Discharge at +25°C (77°F)  
Based on BCI 2-hour Capacity**

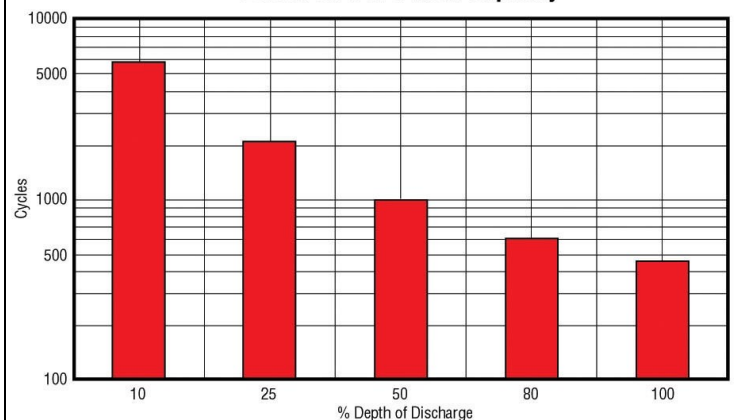

**MK Battery**

1631 South Sinclair Street • Anaheim, California 92806

Toll Free: 800-372-9253 • Fax: 714-937-0818 • E-mail: [sales@mkbattery.com](mailto:sales@mkbattery.com)

